



PRO-DO-MIX®

PRODUZIONE DOSAGGIO MISCELAZIONE

2PM-0650 PREMIUM



3PM-0030 EVOLUTION



3PM-0134 HURRICANE



3PM-0242 MASTER



3PM-1084 EXCELLENT



4PBT45° PITCHED



ANCHOR




COWLES



MARINE PROPELLER



TURBO

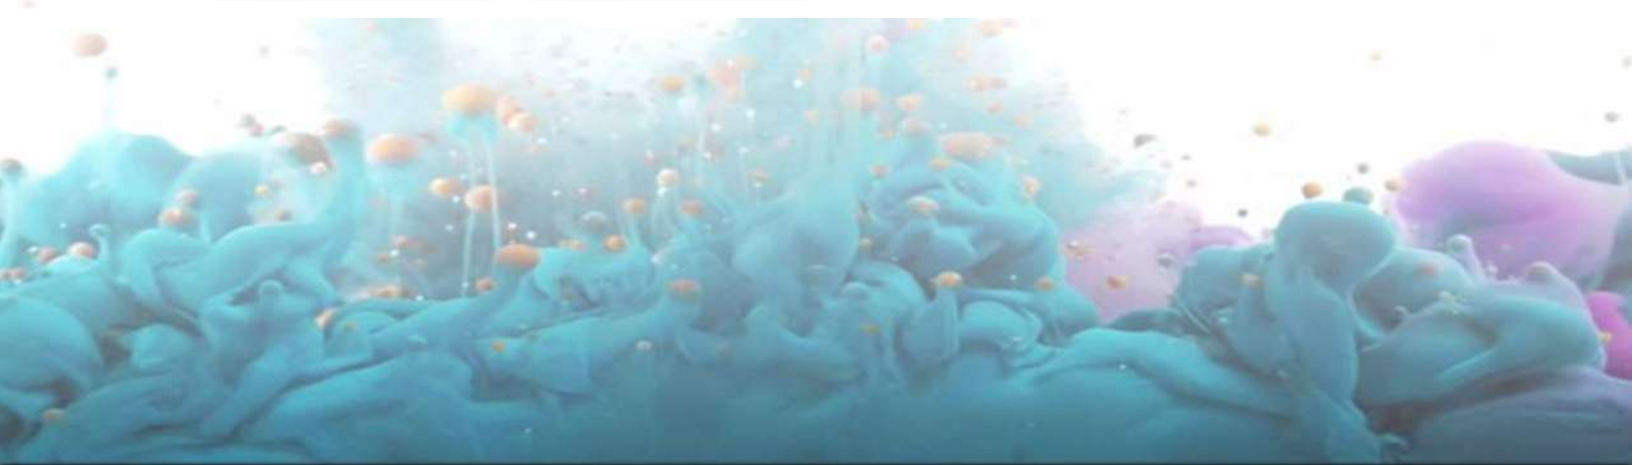



SLOW MIXERS WITH EXCELLENT IMPELLER

*MIXERS ABLE TO LIME MILK PREPARATION / ALUMINIUM
SULPHATE PREPARATION / SEVERAL LIQUID STORAGE 50 / 350
rpm*

STANDARD FEATURES:

- TROPICALIZED MOTOR IE2 400volt / 50Hz three phases (more than 0,75kW)
- COAXIAL GEAR BOX
- RAL6012 PAINT
- IMPELLER ADJUSTABLE POSITION ON SS VERSION

VERSION:

- SS304 (1.4301) / SS316 (1.4408)
- POLYPROPYLENE (slight thickness lined on all parts in contact with liquid)
- RILSAN / ABCITE (slight thickness lined on all parts in contact with liquid)
- LINED BY HALAR / PTFE (slight thickness lined on all parts in contact with liquid)

SOME OPTIONAL:

- IE2 440volt / 60Hz three phases MOTOR
- 230volt / 60Hz three phases MOTOR
- 220volt / 50Hz mono phase MOTOR
- 230volt / 60Hz mono phase MOTOR
- MANUAL SPEED VARIATOR
- FREQUENCY CONVERTER BUILT ON MOTOR
- TWIN EXCELLENT IMPELLERS
- IMPELLER WITH 3 BLADES DETACHABLE FOR DECREASE DIAMETER OF ENTRY IMPELLER ON TANK
- PP flange + v-ring for preserve motor from acid and acid gas (only on plastic lined version)
- SQUARE BASE MADE OF CARBON STEEL WITH EPOXY COATING
- SLEEVE JOINT MADE OF SS304



POB 1397, KFAR-SABA 44113, ISRAEL

FAX 972 9 7440681 פקס

[HTTP://WWW.ABMOLI.COM](http://www.abmoli.com)

ת.ד. 1397, כפר-סבא 44113

טל. 972 9 7434264

דוא"ל info@abmoli.com E-mail



SLOW MIXERS WITH PITCHED IMPELLER MIXERS

*ABLE TO POLYELECTROLYTE PREPARATION / LIGHT SLUDGE
SUSPENSION / SEVERAL LIQUID STORAGE 100 / 200 rpm STANDARD*

FEATURES:

- TROPICALIZED MOTOR IE2 400volt / 50Hz three phases (more than 0,75kW)
- COAXIAL GEAR BOX
- RAL6012 PAINT
- IMPELLER ADJUSTABLE POSITION ON SS VERSION

VERSION:

- SS304 (1.4301) / SS316 (1.4408)
- POLYPROPYLENE (slight thickness lined on all parts in contact with liquid)
- RILSAN / ABCITE (slight thickness lined on all parts in contact with liquid)
- LINED BY HALAR / PTFE (slight thickness lined on all parts in contact with liquid)

SOME OPTIONAL:

- 230volt / 60Hz three phases MOTOR
- 220volt / 50Hz mono phase MOTOR
- 230volt / 60Hz mono phase MOTOR
- MANUAL SPEED VARIATOR
- FREQUENCY CONVERTER BUILT ON MOTOR
- TWIN PITCHED IMPELLERS
- PP flange + v-ring for preserve motor from acid and acid gas (only on plastic lined version)
- SQUARE BASE MADE OF CARBON STEEL WITH EPOXY COATING
- SLEEVE JOINT MADE OF SS304



POB 1397, KFAR-SABA 44113, ISRAEL

FAX 972 9 7440681 פקס

[HTTP://WWW.ABMOLI.COM](http://www.abmoli.com)

ת.ד. 1397, כפר-סבא 44113

טל. 972 9 7434264

דוא"ל info@abmoli.com E-mail