

## Neon<sup>®</sup> DIS

Disinfectant measurement

### Single channel water monitoring instrument

Neon<sup>®</sup> is a leading edge measuring and control instrument. Its range of functions can be tailored according to customers' applications.

The entry level version contains inputs for measurements and temperature, one digital input and an alarm relay. Various add-ons are available to expand the functionality as well as wall mounted or panel mounted housing. Neon's<sup>®</sup> water measurement process can be controlled at any time, from any place, on any device via Kuntze's Cloud Connect<sup>®</sup> service. All Kuntze products are Made in Germany.



### Applications



**CLEAR. CONTROL. CONNECT.**

## Neon® DIS

### Technical data

#### Measuring range

Free Chlorine, Chlorine Dioxide	up to 1000 µg/l, 5.00 mg/l / 10.00 mg/l / 20.00 mg/l
Ozone	up to 1000 µg/l, 5.00 mg/l / 10.00 mg/l
Hydrogen Peroxide	up to 30.0 mg/l
Total Chlorine	up to 1000 µg/l, 5.00 mg/l / 10.00 mg/l / 20.00 mg/l

#### Input characteristic

Temperature measuring range	-30.0 °.. +140.0 °C (-22.0 °.. 284 °F)
Temperature compensation	0.0 .. 8.0 %/K adjustable coefficient
Digital input	1 as controller stop by external contact, option: 2nd as controller stop or Flow measurement for volume based dosing
Measurement conditions	pressure depending on assembly

#### Output characteristics

Alarm relay	1 potential-free N/O contact, max. 250 V, 6 A, 550 VA (invertable)
Output signal	Option: 2 x 0/4 .. 20 mA (scaleable, galvanically isolated)
	Load max. 500 Ohm
	Registration range scaleable within the measuring range
Storage media	SD card up to 1 GB - Industry standard
Serial interface	Option RS 485 Modbus RTU
	Baud rate 19200 bps
	Data format 8 bit

#### Power supply

Line voltage	85.. 265 V AC, +6/-10 %, 50.. 60 Hz; option: 24 V DC
Power consumption	10 VA

#### Process conditions

Temperature	Storage -20 °.. +65 °C (-4 °..+149 °F)
	Operation 0 .. +50 °C (32 °.. 122 °F)
Humidity	max. 90 % rH at 40 °C (non-condensing)
Protection class	Wall mounted IP 65
	Panel mounted IP 54 (front), IP 30 (housing)

#### Controller

Control response	Option: on / off controller (adjustable hysteresis) P / PI / PID controller (pulse-pause, pulse-frequency or continuous output) servo motor control
Relay	2 relays, each with a potential-free N/O contact, max. 250 V, 6 A, 550 VA
Start delay	0.. 200 sec until controller active
Controller stop	Digital input

#### Proportion to volum

Control mode	Option: volumed based by flow measurement
Flow measurement	Impuls measurement NPN (by digital input 2)
Flow measurement	Engine speed 0.030.. 9.999 l/Imp
Relay 1	Potential-free N/O contact, max. 250 V, 6 A, 550 VA (pulse-pause, pulse-frequency)
Relay 2	Activating circulation pump

### Certificates and approval

CE-Symbol

The product meets the requirements of the harmonized European standards and complies with the legal requirements of the EC directives EN 61000 6-1 (3) EN 61000 6-2 (4) EN 61326

EMC

### Design configuration

Material

ABS

Dimensions

Panel mounted housing 138 x 138 x 83 mm (max. wall thickness: 5 mm)

Wall mounted housing 144 x 144 x 156 mm

Mounting dimension

Panel mounted housing 138 x 138 x 42 mm

Weight

0.6 kg (wall mounted housing: 1 kg)

Connection

Cable inlet 2 x M16, 2 x M12 + optional: 2 x M12 and 1 x M25


Plug-in terminal rigid / flexible 0.2 - 2.5 mm<sup>2</sup> / 0.2 - 2.5 mm<sup>2</sup>

Measurement


rigid / flexible 0.2 - 1 mm<sup>2</sup> / 0.2 - 1.5 mm<sup>2</sup>

### Mechanical drawing


Neon® panel mounted

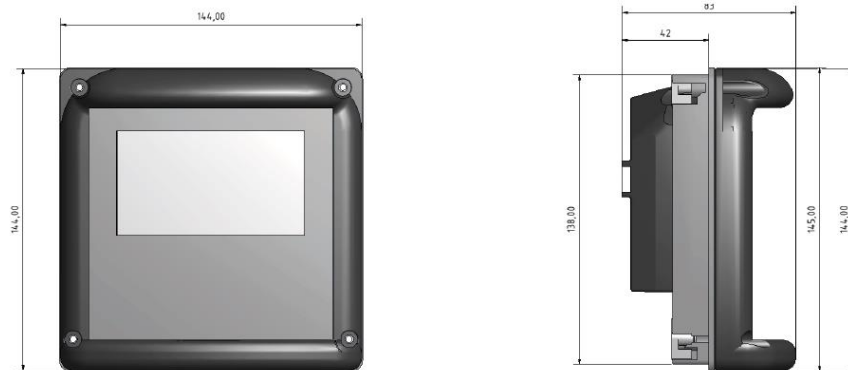

Neon® wall mounted

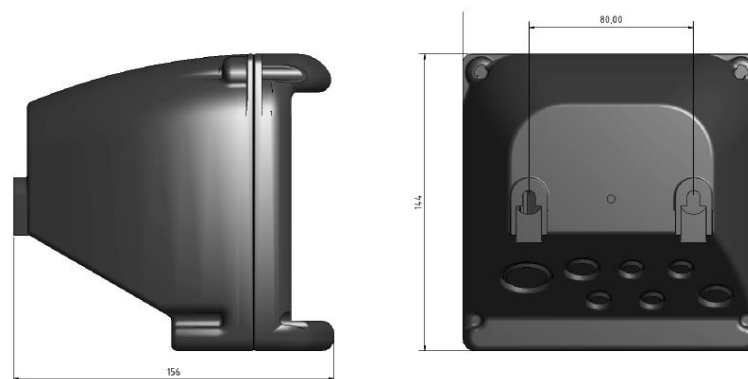

## Interface diagram

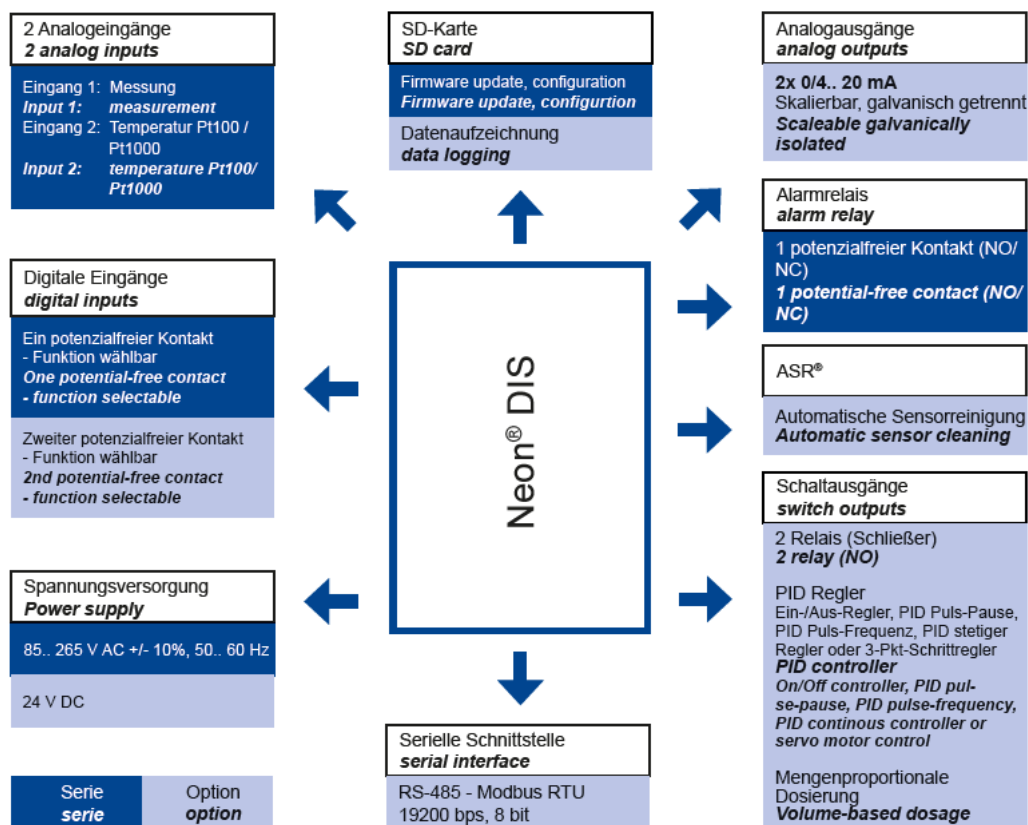

Hanagar 3 Kfar saba נגור 3 כפר סבא  
P.O.B 1397 ת.ד. 1397  
Tel 09-7434264 טל. 09-7434264  
Fax 09-7440681 פקס 09-7440681

[info@abmoli.com](mailto:info@abmoli.com)  
[WWW.ABMOLI.COM](http://WWW.ABMOLI.COM)